



NEOPAN 1600 Professional

FEATURES AND USES

NEOPAN 1600 SUPER PRESTO is a high speed black and white negative film with an exposure index of 1600.

- Relative to the development conditions selected, this film offers the most frequently used range of black and white photographic speeds (EI 400 ↔ 1600) while providing also a very high quality image characterized by fine grain, elevated sharpness, and three dimensional depth.
- The EI 1600 speed is derived through the same short development time required of NEOPAN 400 Professional film.
- Static mark inhibition stability has been enhanced.
- Camera contained film transportability has been increased allowing for rapid rewind.

As a result of the above, this film is particularly suited to action-stopping photography, stage photography, night and indoor work where light levels are low, mass media and reportage work, and other professional applications.

FILM SIZE AND BASE USED

135 24- and 36-exp.	} Gray-tinted cellulose triacetate 0.122 mm thick
35 mm 30.5 m (100 ft), darkroom loading type	

SPEED

EI* 1600/33°

COLOR SENSITIVITY

Panchromatic

EXPOSURE

To obtain the best photographic results, correct exposure is indispensable, and for correct exposures the use of an exposure meter is recommended. If an exposure meter is not available, as a guide use the exposures suggested in the tables below.

Exposure Guide Tables

a. Standard Exposure at EI 1600

Light Conditions	Nighttime Indoor Scenes	Evening Scenes	Night Scenes	Stage Scenes		Indoor Sports Scenes	Night Game Scenes
				Normally Illuminated	Highly Illuminated		
Lens Aperture	f/2.8 to 4	f/4 to 5.6	f/2.8 to 4	f/4	f/8	f/2.8	f/4 to 5.6
Exposure Time (sec.)	1/60	1/125	1/60	1/125		1/250	

b. Outdoor Exposure at EI 800

Light Conditions	Seashore or Snow Scenes under Bright Sun	Bright Sunlight	Fine Weather Daylight Scenes	Cloudy Bright	Cloudy Day or Open Shade
Lens Aperture	f/22	f/16	f/16	f/11	f/8
Exposure Time (sec.)	1/1000		1/500		

* EI (Exposure Index) is the exposure determination designator and the camera or exposure meter ISO speed should be set to this value.

Flash Exposures

When electronic flash exposures are to be made, use the shutter speeds designated for the particular camera involved. The lens aperture for electronic flash exposure is determined from the particular flash unit guide number, using the formula given below.

Lens Aperture (f-number) = $\frac{\text{Guide Number (EI 1600)}}{\text{Flash-to-Subject Distance (meters or feet)}}$

When an automatic electronic flash unit is employed, it should be set at EI 1600. Electronic flash is, in the same manner as flashbulb photography, dependent on the reflectivity of the surroundings. Observe the electronic flash unit instructions.

Filter Recommendations

When a filter is to be used, multiply the normal exposure by a proper filter factor using the table below as a guide.

Filter	Fuji Filter	SC-39 (UV)	SC-48 (yellow)	SC-56 (orange)	SC-60 (red)
	Wratten Filter	No. 1A	No. 8	No. 21	No. 25
Filter Factor	Daylight	1.0	2.0	4.0	8.0
	Tungsten	1.0	1.5	3.0	6.0

SAFELIGHT

The film should be handled in total darkness. If a safelight is required, a Fuji Safelight Filter SLG4 (dark green) with a 20 watt bulb may be used at a distance not less than 1 meter (3.3 feet). In such cases, use the safelight durations that are short as possible and towards the end of the development period.

PROCESSING

Development

Processing times and temperatures for development are shown below. To prevent the appearance of development marks and assure uniform finish, agitate the developer continuously for the first minute and for five seconds every minute thereafter.

Development Conditions (Small Tank Processing)

Agitation: Agitate continuously for the first minute and for five seconds every minute thereafter.

Unit: minutes

Developer	EI	Temp.				
		18°C (64°F)	20°C (68°F)	22°C (72°F)	24°C (75°F)	26°C (79°F)
SPD [Super Prodol]	1600	5¼	4¼	3½	NR	NR
	3200	10	8	6½	5	4
SPD (1:1)	1600	8	6½	5½	4½	3¾
Fujidol	1600	8	6½	5¼	4¼	3½
Fujidol (1:1)	1600	11½	9	7	5½	4¼
Microfine	250	6¼	5	4	3¼	NR
	400	7½	6	4¾	3¾	3
	800	10	8	6½	5	4

NR: Not Recommended

Non-Fuji Film Developer Processing

Unit: minutes

Developer	EI	Temp.	18°C (64°F)	20°C (68°F)	22°C (72°F)	24°C (75°F)	26°C (79°F)
D-76		400	4 ³ / ₄	4	3 ¹ / ₄	NR	NR
		800	6	5	4 ¹ / ₄	3 ¹ / ₂	NR
		1600	9	7 ¹ / ₂	6	5	4
		3200	NR	15	12	10	8
D-76 (1:1)		400	6 ¹ / ₂	5 ¹ / ₂	4 ³ / ₄	4	3 ¹ / ₂
		800	8	7	6	5	4 ¹ / ₄
		1600	11	9	7 ¹ / ₂	6 ¹ / ₂	5 ¹ / ₂
D-76 (1:3)		800	13	11 ¹ / ₂	10	9	8
		1600	17	15 ¹ / ₄	13 ¹ / ₂	12	10 ¹ / ₂
Microdol-X		400	8	6 ¹ / ₂	5 ¹ / ₄	4 ¹ / ₄	3 ¹ / ₂
		800	10	8 ¹ / ₄	6 ³ / ₄	5 ¹ / ₂	4 ¹ / ₂
		1600	13	10 ¹ / ₂	8 ¹ / ₂	7	5 ³ / ₄
HC-110 (Dil. B)		800	5 ¹ / ₂	4 ³ / ₄	4	3 ¹ / ₂	NR
		1600	8 ¹ / ₄	7	5 ³ / ₄	5	4 ¹ / ₄
T-MAX Developer		1600	5 ¹ / ₂	4 ¹ / ₂	4	3 ¹ / ₂	3
		3200	12	10	8 ¹ / ₂	7 ¹ / ₂	6 ³ / ₄
T-MAX RS Developer		1600	5 ³ / ₄	5	4 ¹ / ₂	3 ³ / ₄	3 ¹ / ₄
		3200	10 ¹ / ₂	9 ¹ / ₂	8 ¹ / ₂	7 ³ / ₄	7
Microphen		1600	4	3 ¹ / ₄	NR	NR	NR
		3200	7	5 ³ / ₄	4 ³ / ₄	4	3 ¹ / ₄
ID-11		800	5 ¹ / ₄	4 ¹ / ₂	3 ³ / ₄	3 ¹ / ₄	NR
		1600	8	6 ¹ / ₂	5 ¹ / ₂	4 ¹ / ₂	3 ³ / ₄
ACU-1 (1:5)		1600	7	5 ³ / ₄	4 ³ / ₄	4	3 ¹ / ₄

NR: Not Recommended

NOTE The (1:1) and (1:3) parenthetical expressions contained in the above table indicate the amount of water dilution in terms of 1 or 3 parts water to one part developer. Those locations where there are no such parenthetical expressions indicate processing in the developer stock solution without dilution.

Processing Capacities and Times (Small Tank Development, 20°C/68°F) Unit: minutes

Developer	EI	Processing Capacity: 135 36-exp. films										
		1	2	3	4	5	6	7	8	9	10	11
SPD [Super Prodol] (1 lit.)	1600	4 ¹ / ₄				4 ¹ / ₂		4 ³ / ₄		5		—
Fujidol (600 ml)	1600	6 ¹ / ₂	6 ¹ / ₂	6 ¹ / ₂	7	7	7 ¹ / ₂	7 ¹ / ₂	8	—	—	—
Microfine (600 ml)	800	8	8 ¹ / ₂	9	9 ¹ / ₂	—	—	—	—	—	—	—
D-76 (1 lit.)	1600	7 ¹ / ₂				8		8 ¹ / ₂		9		—

• Development Conditions (Deep Tank Processing)

When deep tanks are used, development times should be extended by 5 to 10%, compared to those used with small tanks.

Deep Tank Processing Conditions (Processing Temperatures and times)

Unit: minutes

Processing Temperature Developer EI		18°C (64°F)	20°C (68°F)	22°C (72°F)	24°C (75°F)	26°C (79°F)
Minidol	1600	9	7	5 ¹ / ₂	4 ¹ / ₄	3 ¹ / ₂
Finedol	1250	9	7	5 ¹ / ₂	4 ¹ / ₄	3 ¹ / ₂
Super Finedol	1250	9 ¹ / ₂	7 ¹ / ₂	6	5	4 ¹ / ₄

Stop Bath

For the stop bath a 1.5% acetic acid solution is recommended. Immerse the film in the bath at 15 to 25°C (59 to 77°F) for 20 to 30 seconds while agitating.

Fixing

Fujifix or Super Fujifix is recommended. The recommended fixing times at 15 to 25°C (59 to 77°F) are shown below. The required fixing time is twice the time it takes for the film to become to clear. In order to avoid the lack of fixing uniformity and to prevent film staining, agitate the fixing solution continuously for the first 30 seconds.

Fixer	Type	Fixing Time (min.)
Fujifix	Acid hardening fixer corresponding to F-8	10
Super Fujifix	Acid hardening rapid fixer	3 to 5

Washing

Wash the film in running water for 20 to 30 minutes.
To reduce the washing time, the use of Fuji QW (quick washing agent) is recommended. When using Fuji QW, pre-wash the film for about 30 seconds, immerse it in Fuji QW solution for 1 minute, and wash it in running water for 5 minutes. The required wash water temperature is 15 to 25°C (59 to 77°F).

Drying

After washing, wipe both sides of the film with a sponge, immerse it in a 1-to-200 solution of Fuji Drivel for 30 seconds and hang up if to obtain uniform drying.
For natural drying, hang the film in a well-ventilated dust free location.

Processing in Automatic Processors

Processing Conditions for Hanger-Transport Type Processors

The processing conditions with FujiFilm developers such as Finedol, Super Finedol, and Minidol, are the same as those essential to Fuji Neopan SS film with similar results being obtained.

Processing Example for the Kodak Versamat Processor

Processor Type	Developer	Temperature	Processing Speed (ft/min.)		
			EI 800	EI 1600 (Standard)	EI 3200
5AN	HPD*	26.5°C (80°F)	5.5	4	3
411			5.5	4	3
11C			11	8	6


*Corresponding to the Kodak Type B developer.

Processing Example for the FP220B (FC) Processor



Developer	Temperature	Processing Speed Dial Setting		
		EI 800*	EI 1600 (Standard)	EI 3200
HPD	26.5°C (80°F)	57.5	50	45
SPD [Super Prodol]	30°C (86°F)	52.5	45	40



*When the film leading edge has entered the fixer solution return to standard speed.

SPECTRAL SENSITIVITY CURVE

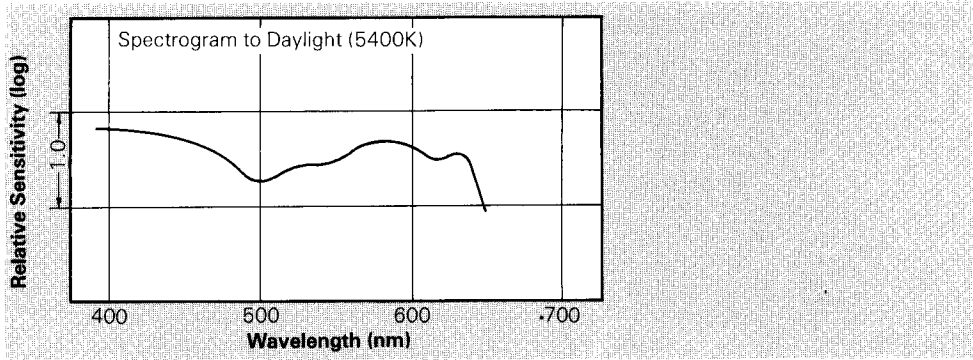


CHARACTERISTIC CURVES

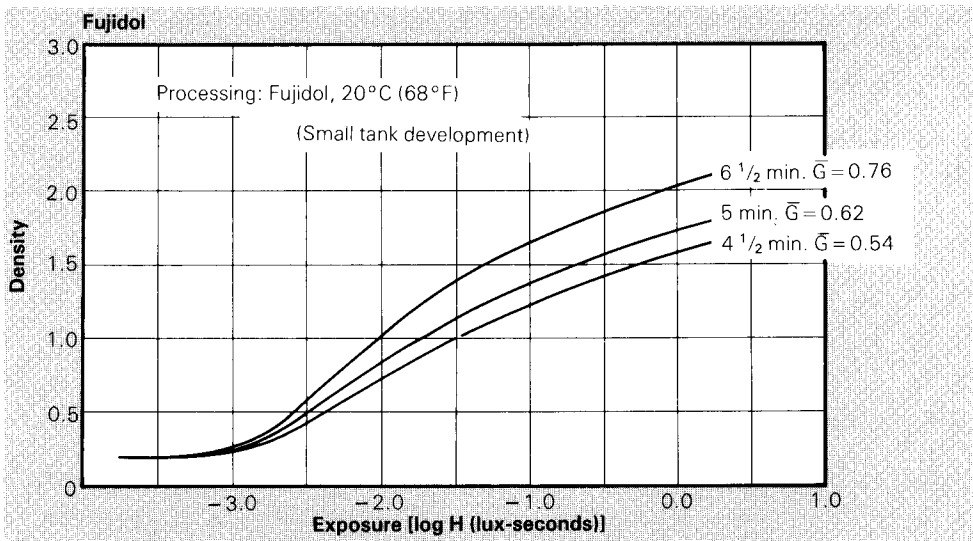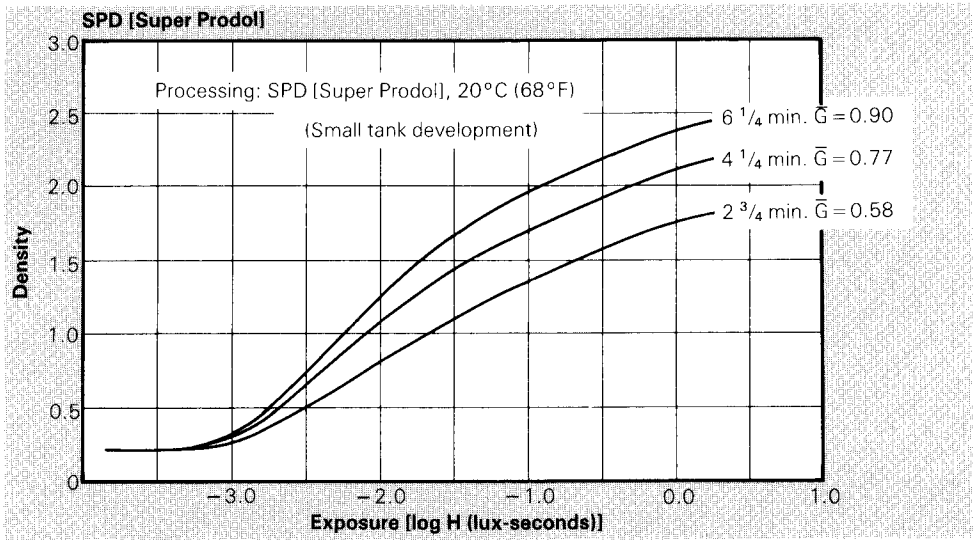

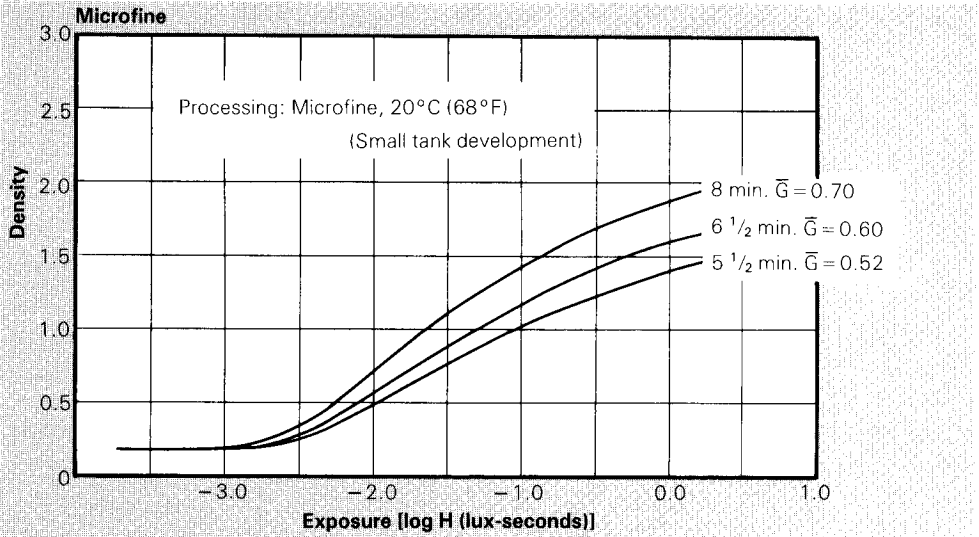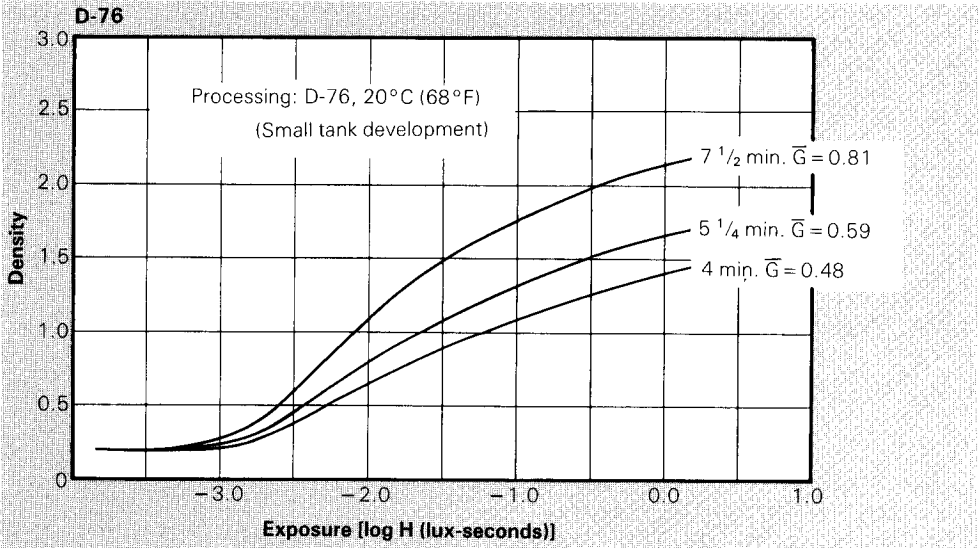

TIME- $\bar{G}$ CURVES

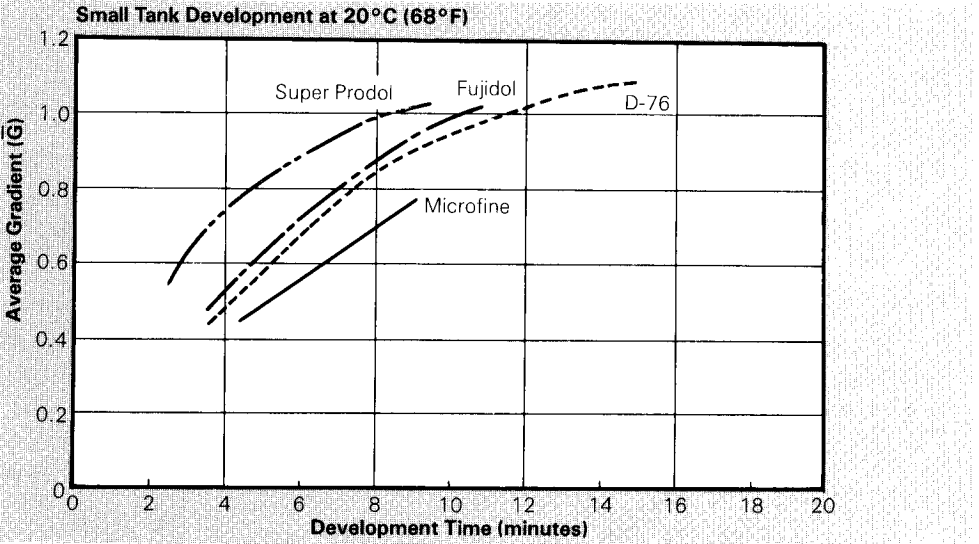

NOTICE

The sensitometric curves and other data herein published were derived from particular materials taken from general production runs. As such they do not represent in exact duplication the characteristics of every lot produced nor a standard for FUJIFILM products. Further, FUJIFILM is in a constant process of upgrading quality which may result in data changes.



FUJI PHOTO FILM CO., LTD.

26-30, Nishiazabu 2-chome, Minato-ku, Tokyo 106, Japan